

DESCRIPTION

Miniature cylindrical recessed housing and round trimless fixture with regressed black baffle. Includes enclosure with integral electronic metal halide ballast and wiring compartment.

SPECIFICATION FEATURES

A...Housing

Aluminum tubing. 2.0" o.d. x .125" wall thickness with inside grooves to hold diode circuit board.

B...LED Board:

.120" thick aluminum core board - slides into tube.

C...End Caps:

Aluminum with groove for rotational adjustment of LED board. Diameter matches o.d. of tube.

D...Diodes:



1 watt 350mA LEDs mounted 1" or 2" o/c. For various beam angles consult factory.

E...Driver:

Input: 120V AC, 350mA constant current for remote location. 36 diodes maximum.

F...Finish:

White, black, or industrial silver powder coat. For custom finishes consult factory.

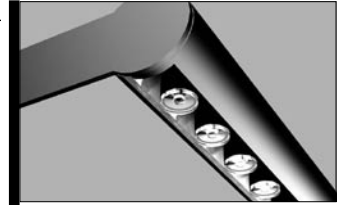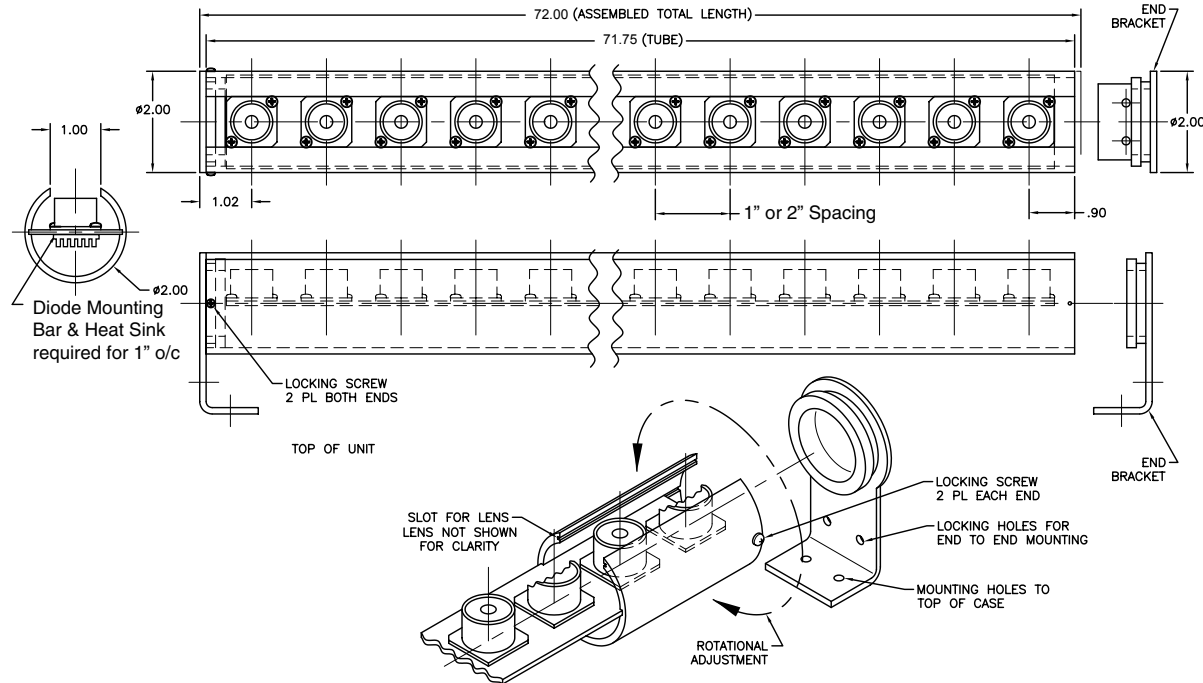

LED LED42-350

Adjustable LED Tube Light

**1 Watt LEDs
@ 1" or 2" o/c**

Sheet 1 of 3



U.L. Listed. Suitable for use in combustible ceilings.

ORDERING INFORMATION

LED42-350						
Fixture Adjustable LED Tube Light	Finish WH = White BK = Black S = Industrial Silver	Beam Angle 10 = 10° Spread 20 = 20° Spread 40 = 40° Spread	Spacing 1 = 1" o/c 2 = 2" o/c	Diode Color CW = Cool White WW = Warm White R = Red B = Blue A = Amber G = Green	Fixture Length 36" Standard Consult factory for custom fixture length.	Arm Extension 3" Standard Consult factory for custom extension length.



DESCRIPTION

Miniature cylindrical recessed housing and round trimless fixture with regressed black baffle. Includes enclosure with integral electronic metal halide ballast and wiring compartment.

Catalog #		Comments	
Project		Prepared By	
Type		Date	

SPECIFICATION FEATURES

Bracket Mounting

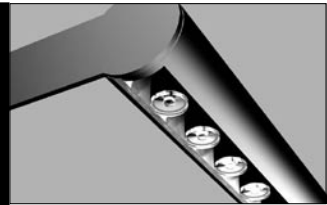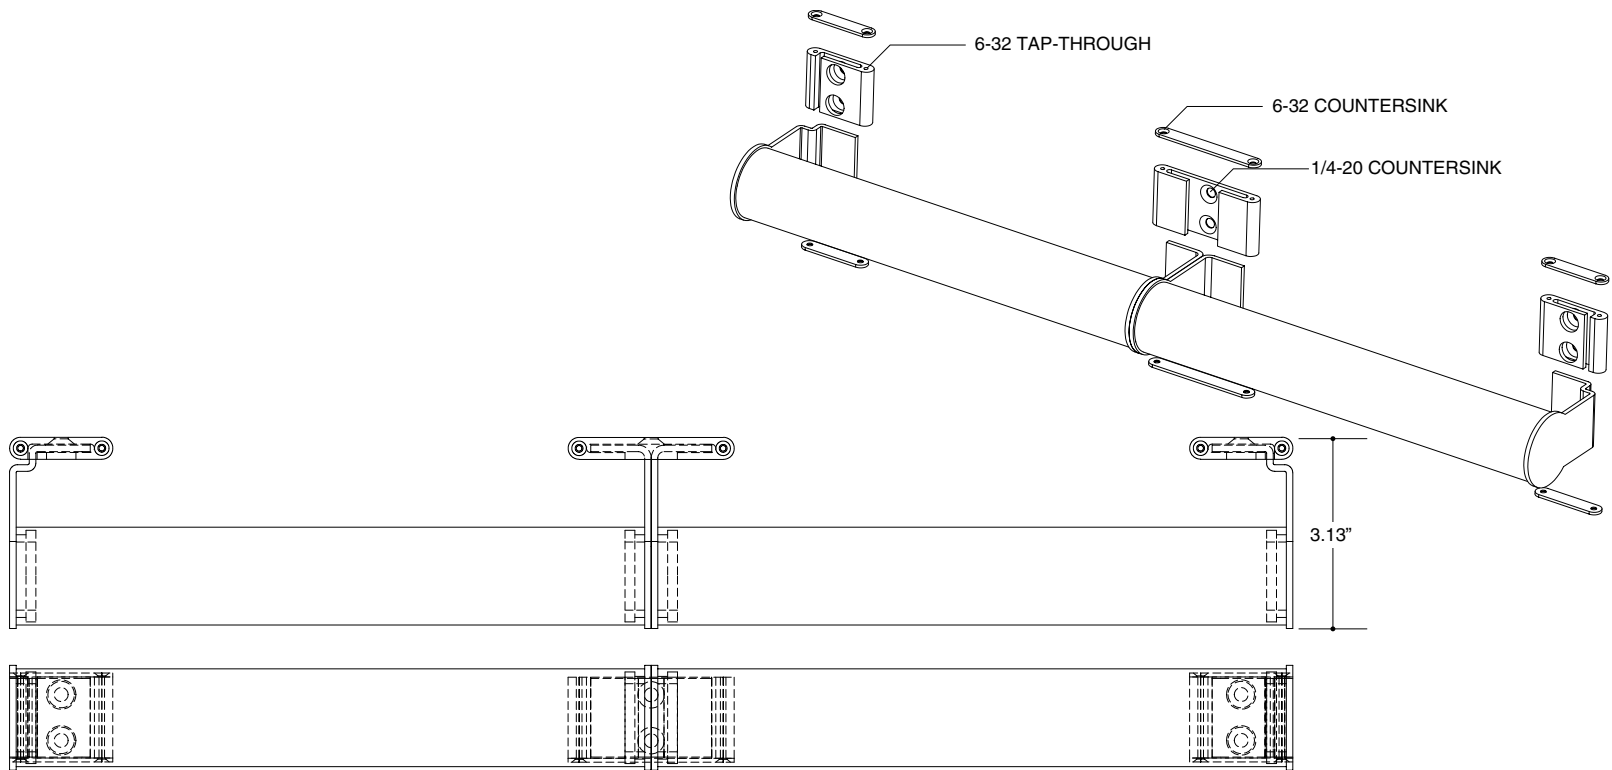

LED
LED42-350

Adjustable LED
Tube Light

1 Watt LEDs
@ 1" or 2" o/c

Sheet 2 of 3



U.L. Listed. Suitable for use in
combustible ceilings.



DESCRIPTION

Miniature cylindrical recessed housing and round trimless fixture with regressed black baffle. Includes enclosure with integral electronic metal halide ballast and wiring compartment.

SPECIFICATION FEATURES

Typical Remote Driver Configuration
Consult factory for other remote options.

Catalog #		Comments	
Project		Prepared By	
Type		Date	

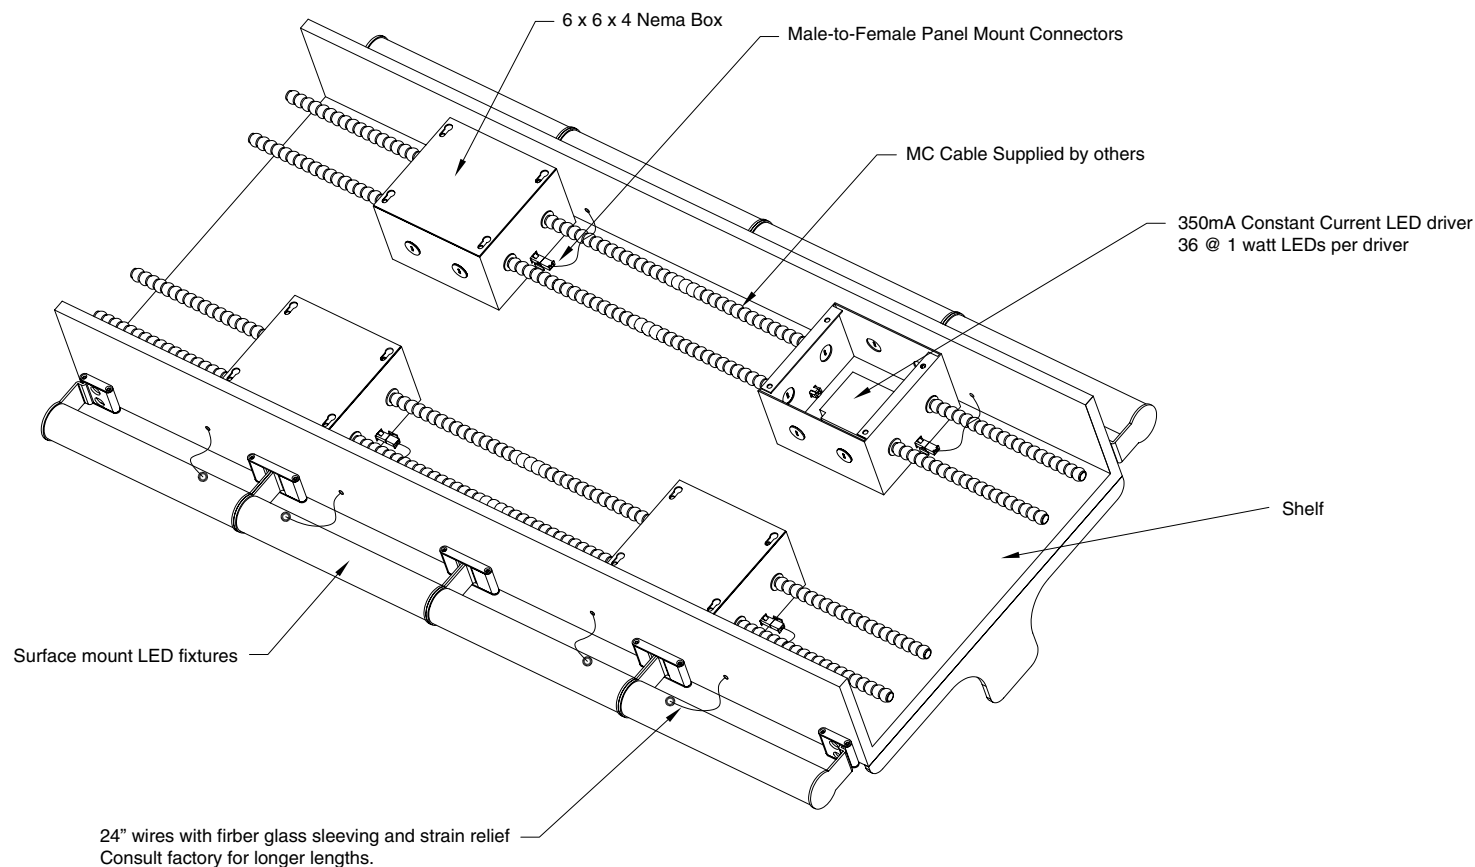

LED LED42-350

Adjustable LED Tube Light

1 Watt LEDs
@ 1" or 2" o/c

Sheet 3 of 3



U.L. Listed. Suitable for use in
combustible ceilings.